


QuOmni 7V-1

QuOmni 7V-1 offers a 360 degrees, 6dBi (2.4GHz) & 7dBi (5GHz) gain signal. It is a perfect indoor and outdoor device for industrial installations.

QuOmni 7V-1Nm is a concurrent dual band, Vertical polarity, omni antenna. It simultaneously operates at 2.4GHz with 6dBi gain and 5GHz with 7dBi gain. This antenna is predicted to be installed as the hotspot in parks, stadiums, warehouses, production halls, malls, lecture halls or another public places. Its aesthetic design is acceptable in most of the visible places. Wide frequency range (2.4-2.5GHz & 5.0-6.0GHz) helps to find suitable frequency for the most effective operation. The antenna comes with built-in Nm connector.



INTEGRATED NM CONNECTOR



OUTDOOR ANTENNA WORKS IN **ANY**
WEATHER CONDITIONS, IP67



CAN BE USED SEPARATELY OR AS A
PART OF A SET



MADE IN **EUROPE**



WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5 - 6 GHz
GAIN	2.4 - 2.5 GHz: 6dBi 5 - 6 GHz: 7dBi
VSWR	< 1.70, max < 2.00
BEAMWIDTH	360°/25°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
MAX INPUT POWER	50W
DC GROUND	No

MECHANICAL SPECIFICATION

MATERIAL	ABS
CONNECTOR	1xNm
OUTER DIMENSIONS	ø3.0 x 22.0 cm ø1.18 x 8.66 inch
WEIGHT	0.2 kg
OPERATING TEMPERATURE	-40°C to +80°C -40°F to 176°F

MOUNTING KIT

MOUNTING PLACE

Single Nm connector

COMPATIBLE ROUTERS

VARIANT: 07V.1NM

ACKSYS

RailTrack, RuggedAir100

ADTRAN

Bluesocket 1940

AEROHIVE NETWORKS

AP1130

ALCATEL-LUCENT

Stellar AP1362

ANYBUS

WLAN Access Point IP67

ARISTA

O-105E, O-235E

ARUBA

AP-274, IAP-274

CISCO

AIR-AP1562E, AIR-AP1572EAC, AIR-AP1572EC, AIR-CAP1532E, AIR-CAP1552EU, AIR-CAP1552H, AIR-CAP1552WU, Catalyst 9124AXE, IW3702-2E, IW3702-4E, IW6300, IW9167E, MR74, MR76, MR84, MR86

D-LINK

DBA-3621P, DWL-8710AP

ENGENIUS

EWS860AP, EWS871AP

EXTREME NETWORKS

AP 360E, AP 3865E, AP 3917, AP 3965E, AP 7562, AP 8163

FORTINET

FAP-222C, FAP-432F, FAP-432FR, FAP-S322C, FAP-S322CR, FAP-S422E, FAP-U422EV, OAP832E


HUAWEI

AP6510DN-AGN, AP6610DN-AGN, AP6760R-51E, AP8130DN, AP8130DN-W, AP8150DN, AP8182DN, AP8760R-X1E


JUNIPER NETWORKS	AP63E
MIKROTIK	L11UG-5HaxD
MIST	AP63E
PEPLINK	AP Pro AX
RUCKUS	T350SE, T750SE
SIEMENS	6GK5748-1GD00-0AB0, 6GK5766-1GE00-7DB0, 6GK5788-1GY01-0AA0, 6GK5788-2GY01-0AA0, 6GK5748-1GD00-0AA0, 6GK5748-1GY01-0AA0, 6GK5766-1GE00-3DA0, 6GK5766-1GE00-3DB0, 6GK5766-1GE00-7DA0, 6GK5766-1GE00-7TA0, 6GK5766-1GE00-7TB0, 6GK5788-1GD00-0AA0, 6GK5788-1GD00-0AB0, 6GK5788-2GD00-0AA0, 6GK5788-2GD00-0AB0, 6GK5788-2GD00-0TA0, 6GK5788-2GD00-0TB0, 6GK5788-2GY01-0TA0, Scalance W738 M12, Scalance W778-1 M12, Scalance W778-1 M12 EEC
WLINK	ODU310
XIRRUS	XH2-120, XH2-240
ZYXEL	WAX655E (AX5400)
OTHER	2 * N-male, 3 * N-male, 4 * N-male

PLOTS



VSWR

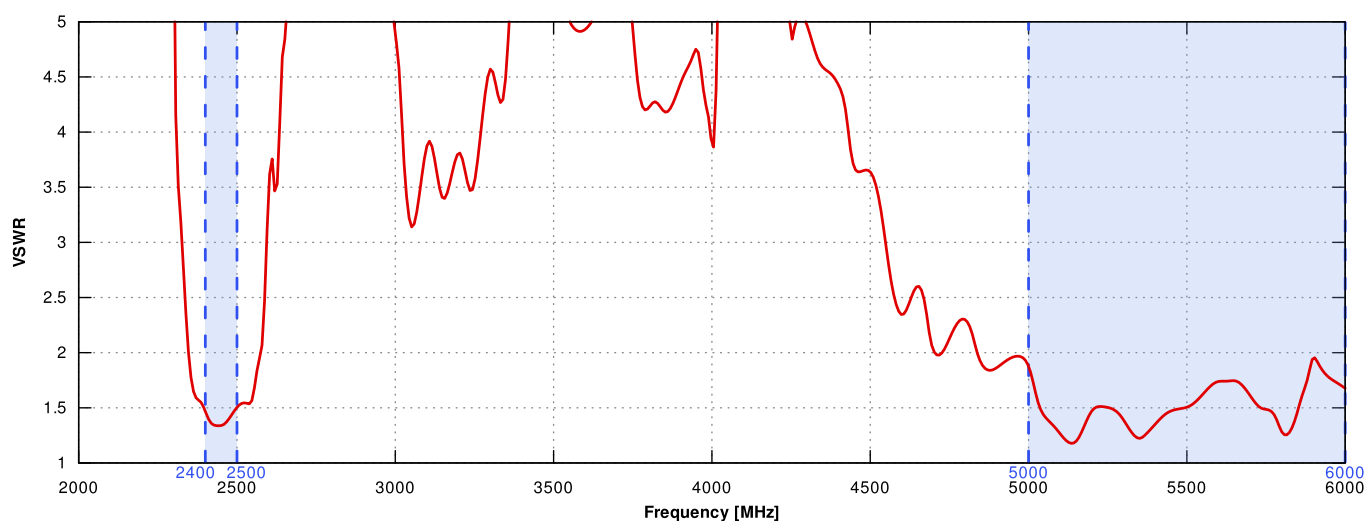

GAIN

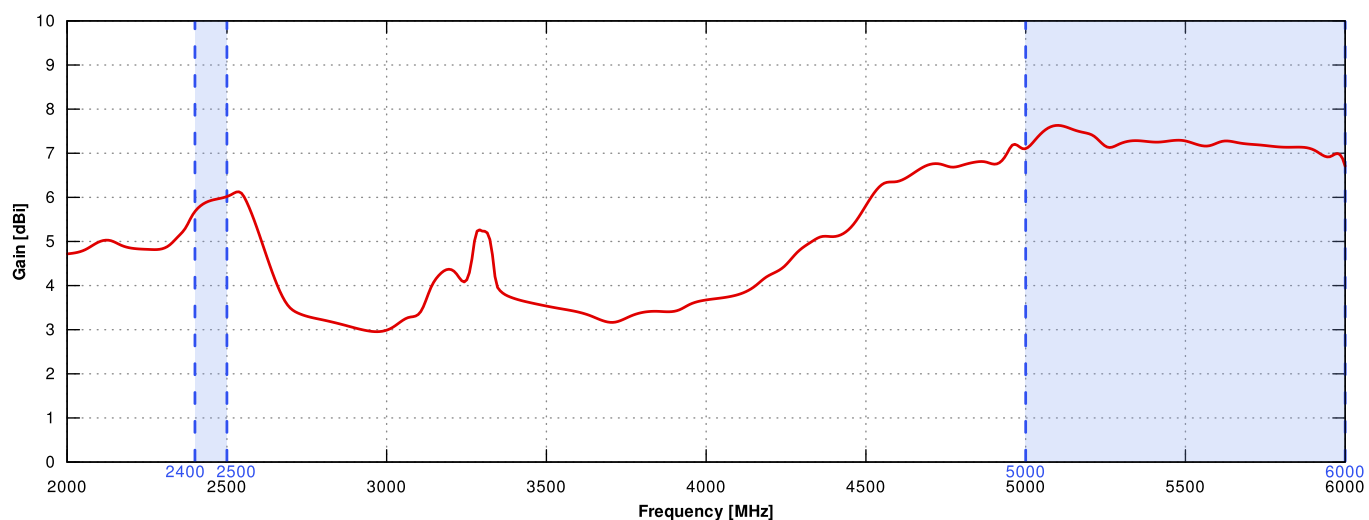

2.4GHz and 5GHz

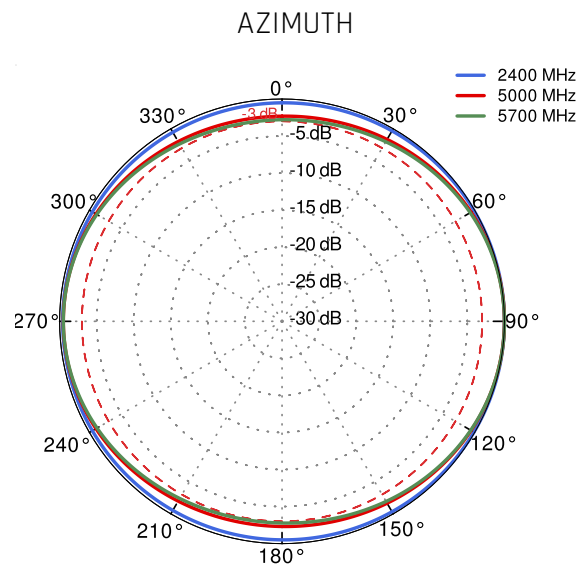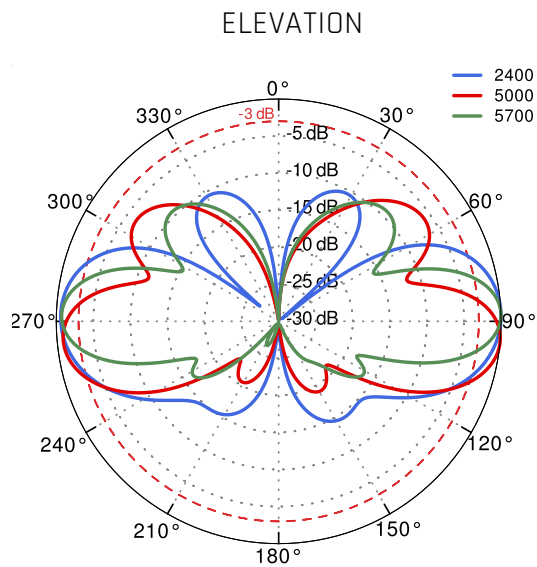

DIMENSIONS

