

QuSector 7V-120-8 Wi-Fi 6E

QuSector 7V-120-8 offers a 120 degrees, 7dBi signal gain. It is a perfect indoor and outdoor device for industrial installations. Wi-Fi 6E support!

QuSector 7V-120-8 is a concurrent triple band, Vertical polarity, panel antenna with 8 connectors. It operates at 2.4GHz, 5GHz and 7GHz simultaneously with 7dBi gain. It is a futureproof solution with Wi-Fi 6E support. Due to its medium gain, it can be used on short or medium distances, for example for hotspots in schools, stadiums, offices or public places. High quality injection moulded enclosure is characterized by a wide range of applications: from indoor through mobile devices to the outdoor (IP67) ones. Wide frequency range (2.4-2.5GHz & 5.0-7.125GHz) helps to find suitable frequency for the most effective operation. The antenna comes in three versions: with 8*70cm (28inch) cables terminated with Nm, RPSMA, RPTNC connectors.



ANTENNA **PERFECTLY MATCHED** WITH
THE ACCESS POINT



ADJUSTABLE, POLE MOUNTING
SYSTEM



MADE IN **EUROPE**



WI-FI ANTENNA SPECIFICATION

| | |
|-------------------------------|--|
| FREQUENCY | 2.4 - 2.5 GHz 5.0 - 7.125 GHz |
| GAIN | 2.4 - 2.5 GHz: 7 dBi 5.0 - 7.125 GHz: 7 dBi |
| VSWR | <1.80 |
| BREAMWIDTH | 120°/60° 120°/90° |
| POLARIZATION | Vertical |
| IMPEDANCE | 50 Ω |
| SEPARATION BETWEEN CONNECTORS | >30dB |
| FRONT-TO-BACK | 20dB |
| MAX INPUT POWER | 50W |
| DC GROUND | Yes |

MOUNTING KIT

| | |
|----------------|---------------------------|
| MATERIAL | Galvanized |
| WEIGHT | 0.87 kg |
| MOUNTING PLACE | Mast |
| MAST DIAMETER | 25-60mm 0.98-2.36 inch |

MECHANICAL SPECIFICATION

| | |
|-----------------------|--|
| MATERIAL | ABS |
| CONNECTOR | 8xRPSMA/8xNM/8xRPTNC |
| OUTER DIMENSIONS | 272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch |
| WEIGHT | 1.8 kg |
| OPERATING TEMPERATURE | -40°C to +80°C -40°F to 176°F |

COMPATIBLE ROUTERS

VARIANT: S7V.120.8RS

| | |
|-------------------|-----------------------------|
| ACKSYS | AirBox/12 |
| ADTRAN | Bluesocket 3045 |
| AEROHIVE NETWORKS | AP510CX, AP650X |
| ALCATEL-LUCENT | Stellar AP1232 |
| ARUBA | AP-654 |
| ENGENIUS | ECW270, EWS371AP |
| EXTREME NETWORKS | AP460e, AP510CX, AP510e |
| FORTINET | FAP-S423E, FAP-U423EV |
| HUAWEI | AP6760-X1E |
| XIRRUS | XA4-240, XR-2000H, XR-2425H |

VARIANT: S7V.120.8NM


| | |
|-------------------------|--|
| ACKSYS | RailTrack |
| CISCO | IW9167E |
| ENGENIUS | EWS871AP |
| EXTREME NETWORKS | AP 8163 |
| FORTINET | FAP-S422E, FAP-U422EV |
| HUAWEI | AP8182DN, AP8760R-X1E |
| SIEMENS | 6GK5788-2GY01-0AA0, 6GK5788-2GY01-0TA0 |
| XIRRUS | XH2-240 |

VARIANT: S7V.120.8RT


| | |
|--------------|------------------|
| CISCO | Catalyst 9117AXI |
|--------------|------------------|

PLOTS



VSWR

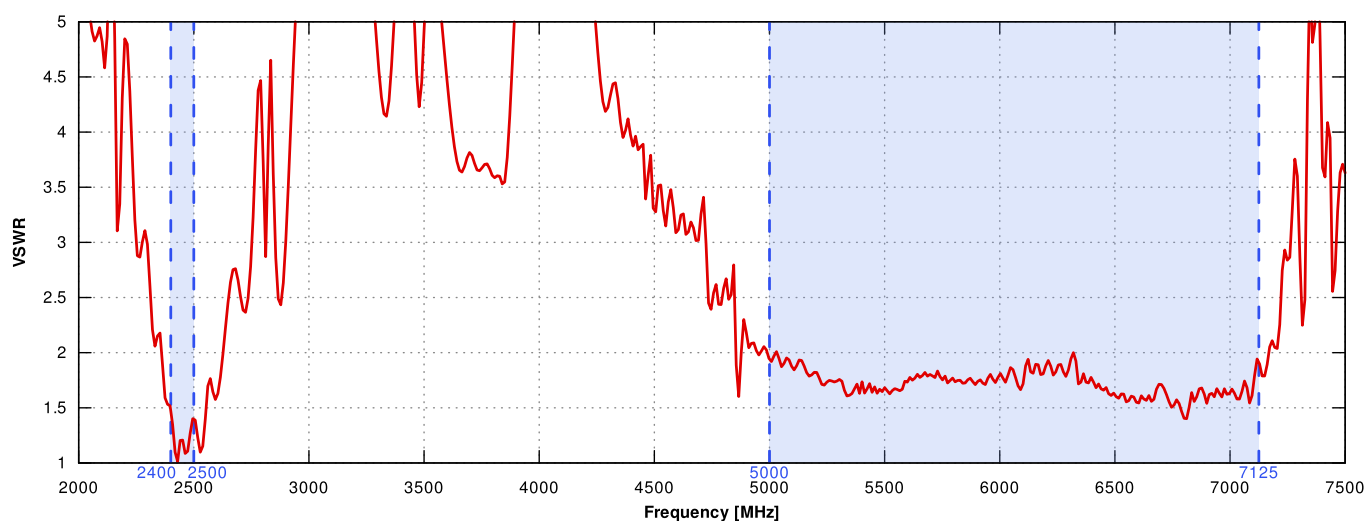



Gain

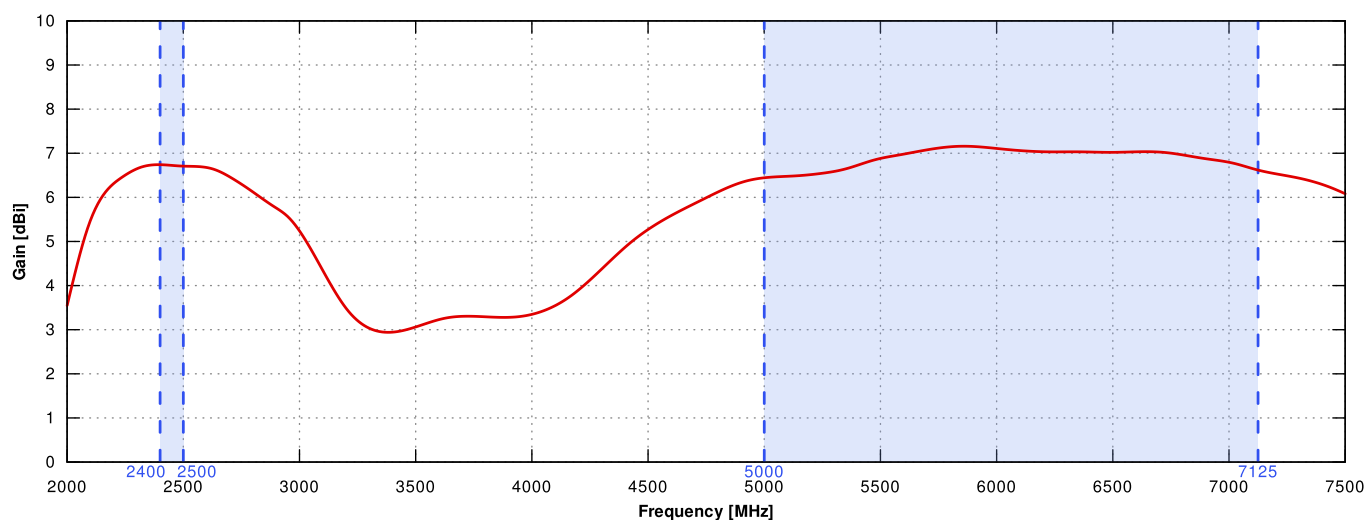

From 2.4GHz to 2.5GHz

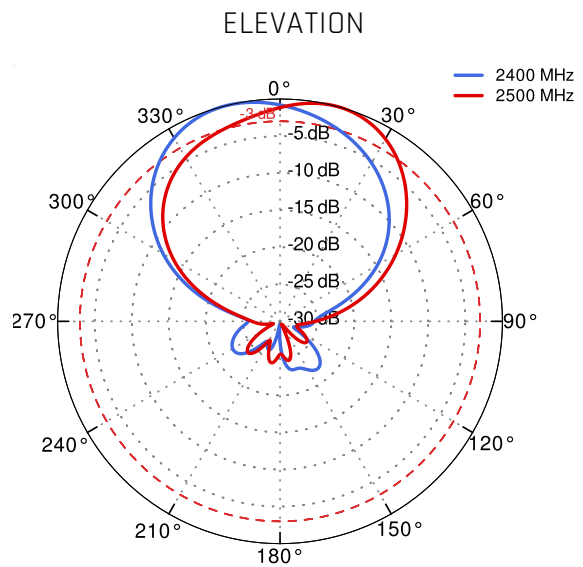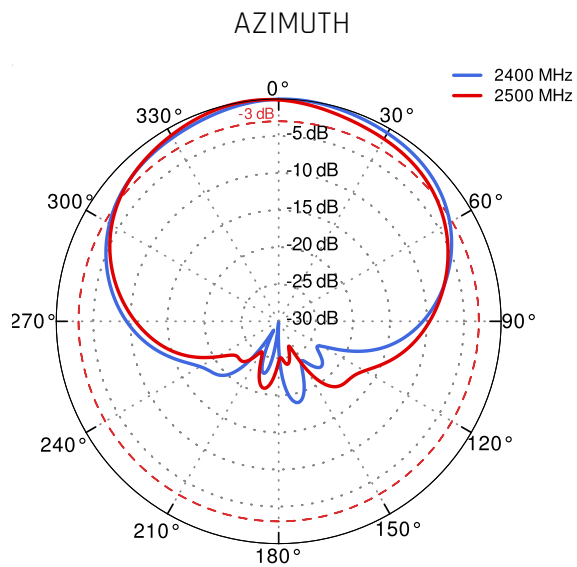

From 5.1GHz to 6.9GHz

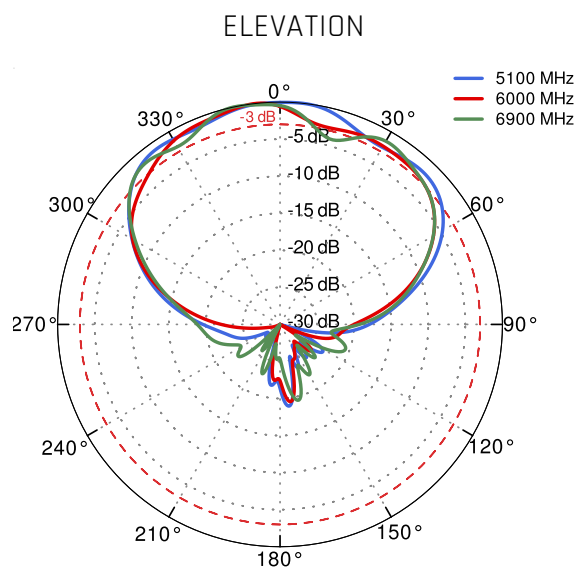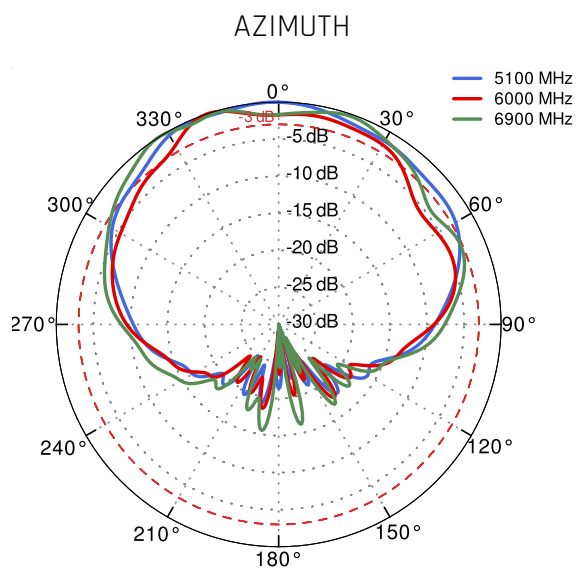

DIMENSIONS

