

QuSpot for Teltonika TRB245/TRB255

INTEGRATED MULTI-BAND LTE OMNI ANTENNA + GPS ANTENNA + POE SPLITTER + PLACE TO INSTALL TELTONIKA TRB245/TRB255 (ALL-IN-ONE)

QuSpot omni LTE antenna for Teltonika TRB245 or TRB255 gateway is a perfect outdoor device for mobile and fixed installations like industrial, hotspots, yachts, boats, campers, RV etc. The LTE/5G antenna supports band 71. It has embedded also GPS antenna. If you use TRB245/TRB255 with QuSpot antenna, you get an integrated complete solution with embedded gateway and multi band antennas in one enclosure.

The set contains a [PoE splitter](#), allowing to provide both data and power via one Ethernet cable and keep Gigabit transfer speeds.

4G
LTE **GPS****BAND 71**
617-3800MHz
4 dBi
OMNI DIRECTIONAL
IP 67

OUTDOOR ANTENNA WORKS IN ANY WEATHER CONDITIONS, IP67



GALVANIZED STEEL, WALL OR POLE MOUNTING BRACKET




BEAMWIDTH (360)



GAIN (4DBI)



MADE IN EUROPE

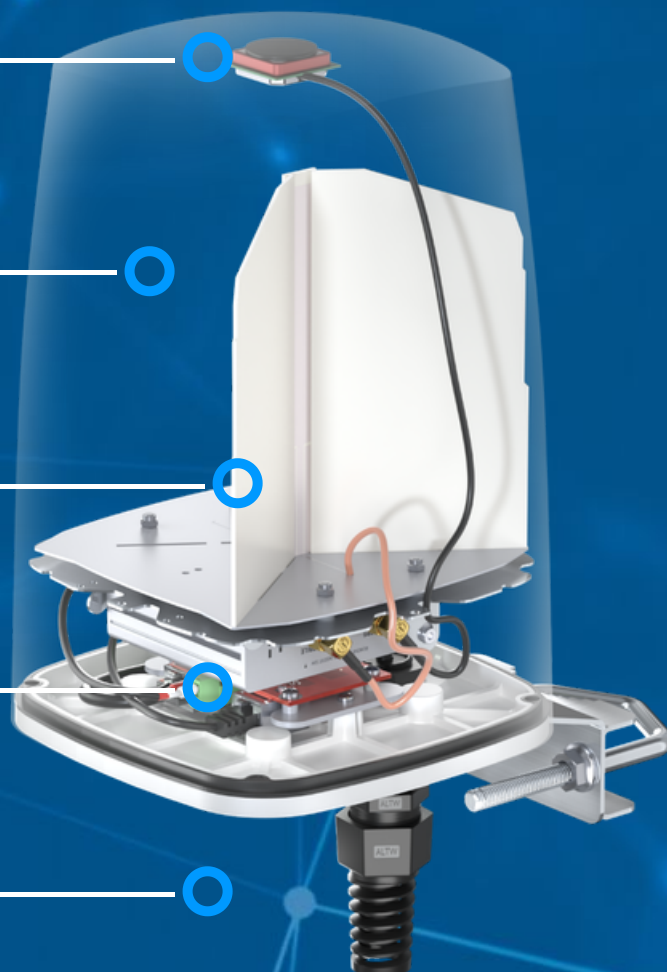

LTE ANTENNA SPECIFICATION


FREQUENCY	617 - 960 MHz 1.7 - 2.2 GHz 2.3 - 2.7 GHz 3.3 - 3.8 GHz
GAIN	617 - 960 MHz : 3 dBi 1.7 - 2.2 GHz : 3.5 dBi 2.3 - 2.7 GHz : 3.5 dBi 3.3 - 3.8 GHz : 4dBi
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 23, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 48, 49, 52, 53, 59, 62, 65, 66, 67, 68, 69, 71, 85, n78, n80, n81, n82, n83, n84, n86, n89, n90, n95
VSWR	<1.80, max <2.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

MECHANICAL SPECIFICATION


MATERIALS	ABS, aluminum, PTFE, Fiberglass
CONNECTOR TYPE	RJ45
INGRESS PROTECTION	IP67
DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg 3.31 lbs
OPERATING TEMPERATURE	From -40°C to 75°C From -40°F to 167°F
MAST DIAMETER	40-60 mm 1.57-2.36 inch

PLOTS


VSWR

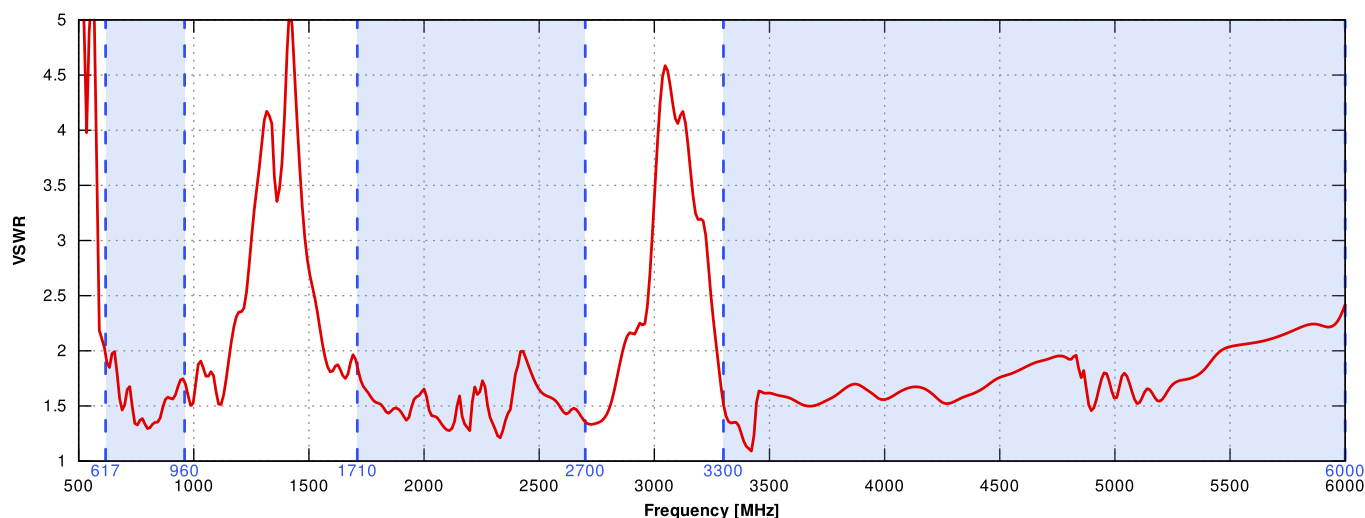



Gain

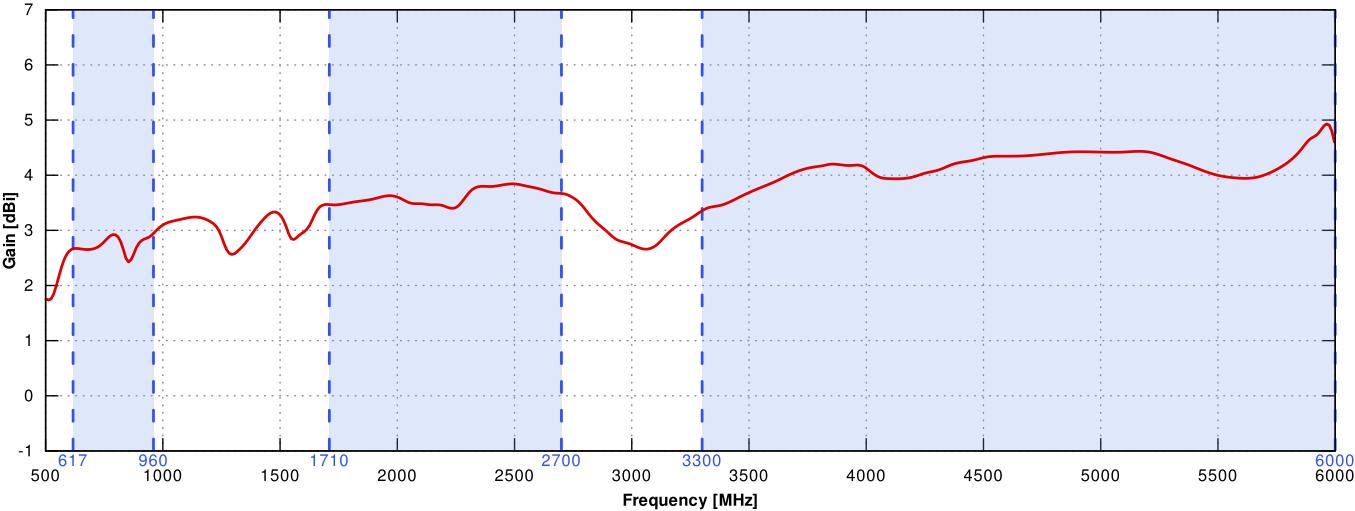

From 650MHz to 950MHz

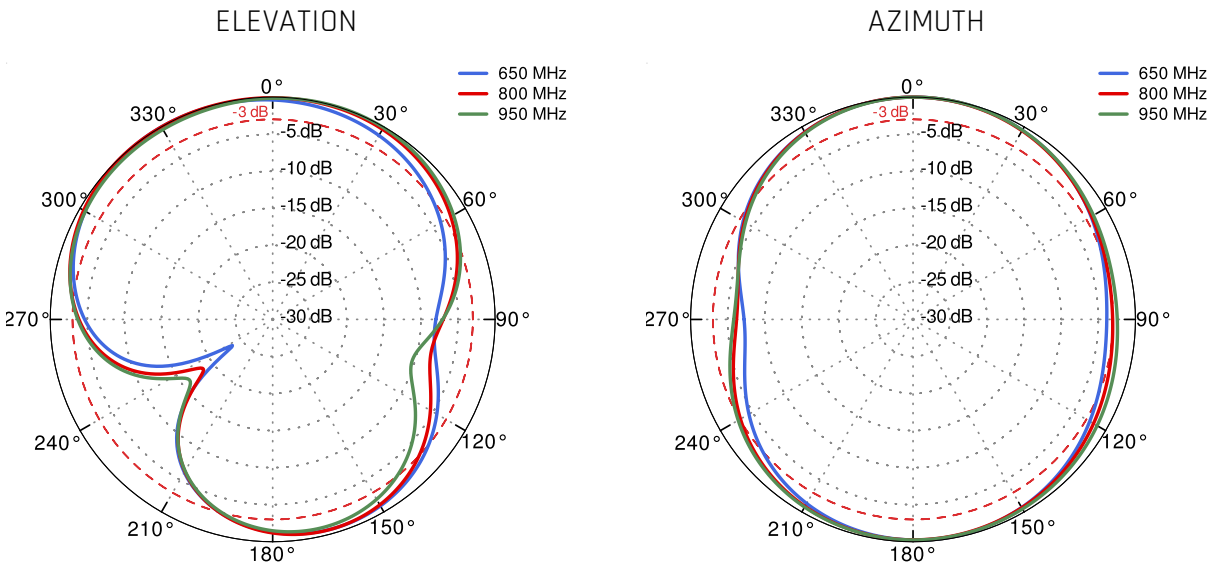

From 1.71GHz to 2.5GHz

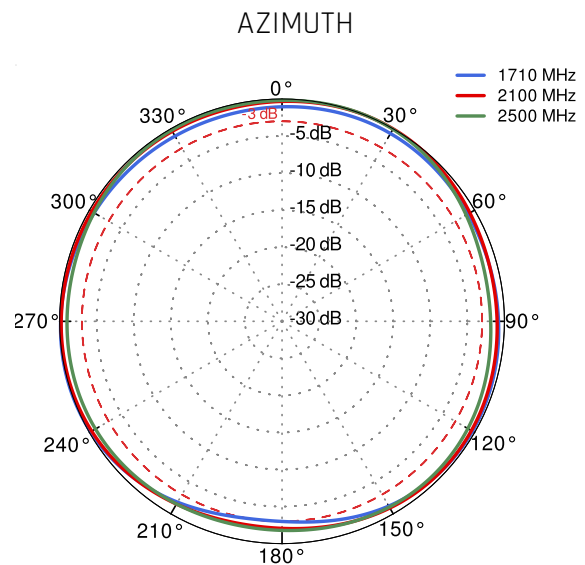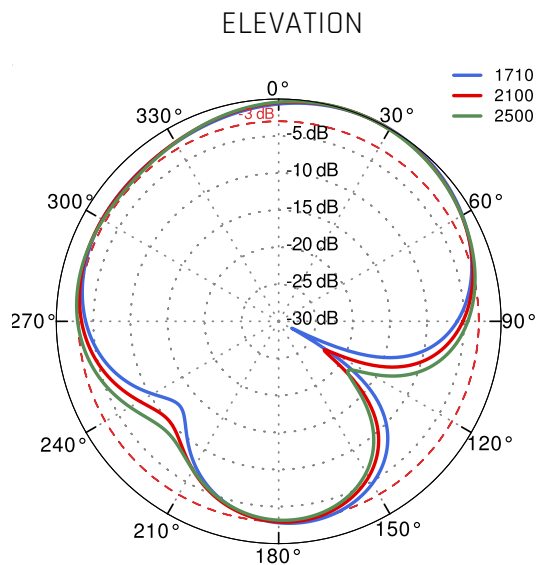

DIMENSIONS

