

QuSector 14HV-90-2 Wi-Fi 6E Nf

QuSector 14HV-90-2 offers a 90 degrees, 14dBi gain signal with two 2.4GHz and 5GHz+7GHz connectors. It is a perfect indoor and outdoor device for industrial installations.

QuSector 14HV-90-2 is a dual band, concurrent, H&V polarity, MIMO 2x2 panel antenna. Two connectors operate at 2.4GHz and **5GHz+7GHz**. It is a futureproof solution with **Wi-Fi 6E** and **Wi-Fi 7** support. Due to its medium gain, it can be used on short or medium distances, for example for hotspots in schools, stadiums, offices or public places. High quality injection moulded enclosure allows to implement it alongside with indoor and IP67 outdoor solutions. The antenna has 2 integrated Nf connectors.



OUTDOOR ANTENNA WORKS IN **ANY WEATHER CONDITIONS**, IP67



ANTENNA **PERFECTLY MATCHED** WITH THE ROUTER



WALL OR MAST MOUNTING SYSTEM WITH **TWO PLANES, 60 DEGREES REGULATION**



MADE IN **EUROPE**



WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5.0 - 7.125 GHz
GAIN	12 dBi 14 dBi
VSWR	< 2.00
BEAMWIDTH	90°/30° 90°/16°
POLARIZATION	Horizontal Vertical
IMPEDANCE	50 Ω
SEPARATION BETWEEN CONNECTORS	>30 dB
FRONT-TO-BACK	> 20dB >25dB
MAX INPUT POWER	50W
DC GROUND	Yes

MECHANICAL SPECIFICATION

MATERIAL	ABS
CONNECTOR	2xNf
OUTER DIMENSIONS	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
WEIGHT	1.8 kg
OPERATING TEMPERATURE	-40°C to +80°C -40°F to 176°F

MOUNTING KIT

DIMENSIONS	9.9 x 10.5 x 14.8 cm 3.9 x 4.13 x 5.83 inch
REGULATION RANGE	+/- 30°
MAST DIAMETER RANGE	25 - 60mm 0.98-2.36 inch
MATERIAL	Polyamide with fiberglass + galvanized steel U-Bolts
MOUNTING PLACE	Wall or ceiling or mast

COMPATIBLE ROUTERS

VARIANT: S14HV.90.2NF


TELTONIKA	RUT900, RUT901, RUT950, RUT951, RUT955, RUT956, RUTX10, RUTX11, RUTX12, RUTX50
DIGI	TX54 LTE-Advanced, TX64, WR44 RR
ROBUSTEL	EG5100, EG5120, EG5200, R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011, R201x, R5020, R5020 Lite
ACKSYS	AirBox LTE, AirBox/10, AirLink, AirWan, AirXroad, AirXroad/4P, RuggedAir100
ADVANTECH	EKI-1361(-MB) EKI-1362, EKI-6233BN, EKI-6333AC-2GD
ANYBUS	Wireless Router WLAN, WLAN Access Point IP30, WLAN Access Point IP67
ARUBA	AP-204, AP-504, IAP-204, RAP-108
CAMBIUM NETWORKS	ePMP 4600L
CISCO	Catalyst IW9165D
COMSET	CM210A-W, CM210Q-W, CM510Q-W, CM550W, CM580W, CM685V-1, CM685V-4, CM685V-6, CM685V-6-G, CM685VX, CM820Q-4, CM820Q-6, CM950W
CRADLEPOINT	E300, IBR600C, IBR900, R1900, R500, R920, S700, W4005
D-LINK	DAP-1665, DAP-2020, DAP-2310, DAP-2360, DBA-3621P, DIS-2650AP, DWL-8720AP, N300 4G
DIGI	TX54 LTE-Advanced, TX64, WR44 RR
ENGENIUS	ENS500EXT

EXTREME NETWORKS	AP 3917, AP 7522, AP 7522E, AP122X, AP305CX
FORTINET	FAP-233G, FAP-U432F
FOUR-FAITH	5G Industrial Router F-NR100, 5G SIM WiFi Router F-NR120, 5G Smart Light Pole Gateway F-G300, Edge Computing Gateway F-G100
HUAWEI	AP4051DN, AP4130DN, AP4151DN
MERU	AP1010E
MIKROTIK	L009UiGS-2HaxD-IN, L11UG-5HaxD, RB922
MOXA	AWK-1131A Series, AWK-1137C Series, AWK-1151C Series, AWK-3131A Series, AWK-3252A Series, AWK-4131A Series, AWK-4252A Series, TAP-213 Series
PEPLINK	AP One Rugged, B One, Balance 20X, BR1 Pro (CAT-20), BR1 Pro CAT-20, BR2 PRO, MAX BR1 Mini M2M, MAX BR1 MK2, MAX BR1 Pro, MAX BR1 Pro 5G, MAX Transit, MAX Transit Duo Pro, UBR Plus
PERLE	IOLAN SCG W Secure Console Server, IOLAN SCG WM Secure Console Server, IOLAN SDG W Serial Device Servers
PROROUTE	H685 LTE 4G CAT6 Router, H685 WRT M2M 5G Router, H900 5G Router
ROBUSTEL	EG5100, EG5120, EG5200, R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011, R201x, R5020, R5020 Lite
RUCKUS	T350SE
SIEMENS	6GK5763-1AL00-7DA0, 6GK5766-1GE00-7DB0, 6GK5763-1AL00-3AA0, 6GK5763-1AL00-3DA0, 6GK5763-1AL00-7DB0, 6GK5766-1GE00-3DA0, 6GK5766-1GE00-3DB0, 6GK5766-1GE00-7DA0, 6GK5766-1GE00-7TA0, 6GK5766-1GE00-7TB0, Scalance W734 RJ45, Scalance W738 M12, Scalance W774 M12 EEC, Scalance W774 RJ45, Scalance W778-1 M12, Scalance W778-1 M12 EEC, SCALANCE W786


SIERRA WIRELESS	AirLink RV55, AirLink RX55
TELTONIKA	RUT900, RUT901, RUT950, RUT951, RUT955, RUT956, RUTX10, RUTX11, RUTX12, RUTX50
WAVETEL	W240 4G/LTE, W2400 LTE , W3600 4G/LTE Dual WAN, W4600, W4600-NR 5G, W4600-S2, WNR320 5G, WNR340 5G, WNR5601 5G
WLINK	ER120, G200, G230, G510, G520, G530, G530, R220, R520
XIRRUS	XR-520H
ZYXEL	LTE3301-PLUS, NWA55AXE
OTHER	2 * N-male, 2 * RPSMA, 2 * RPTNC

PLOTS



Gain

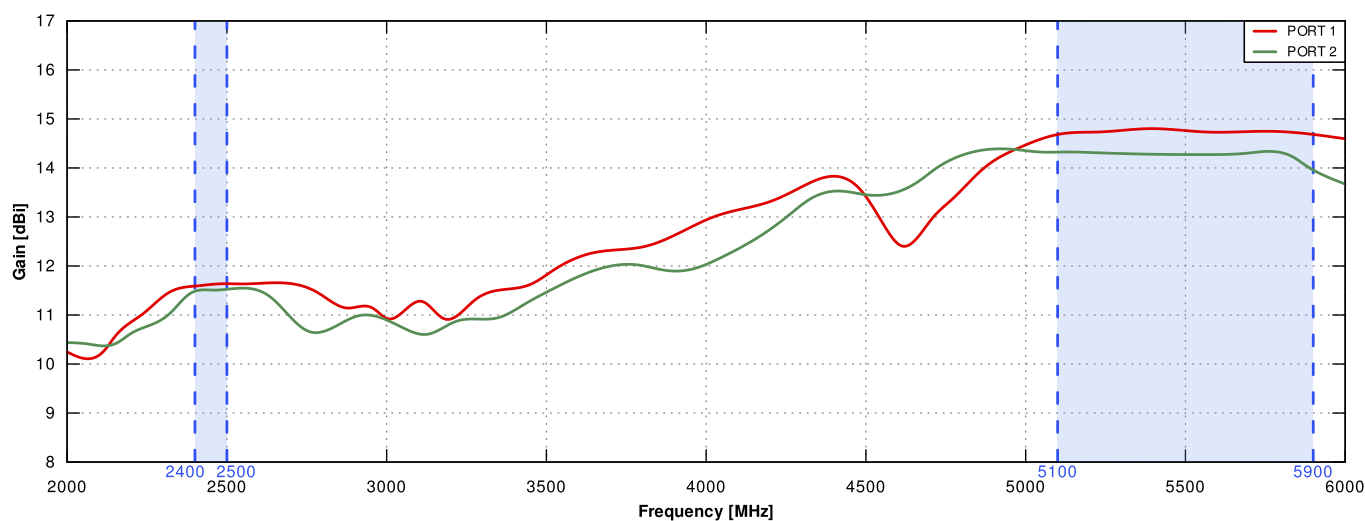


VSWR

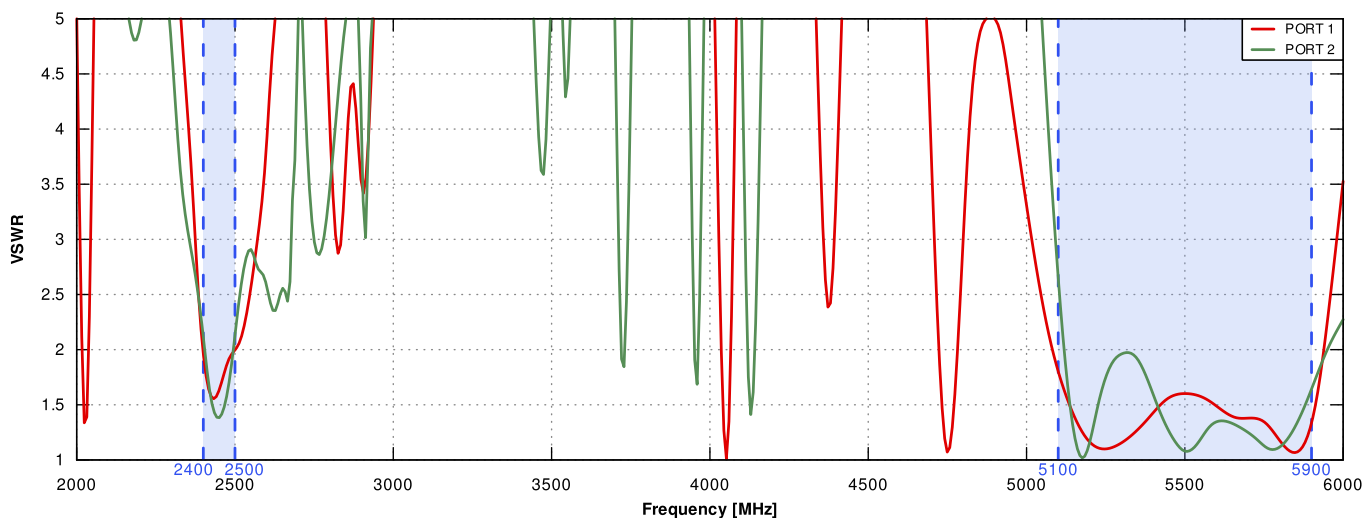


PORT 1 From 2.4GHz to 2.5GHz

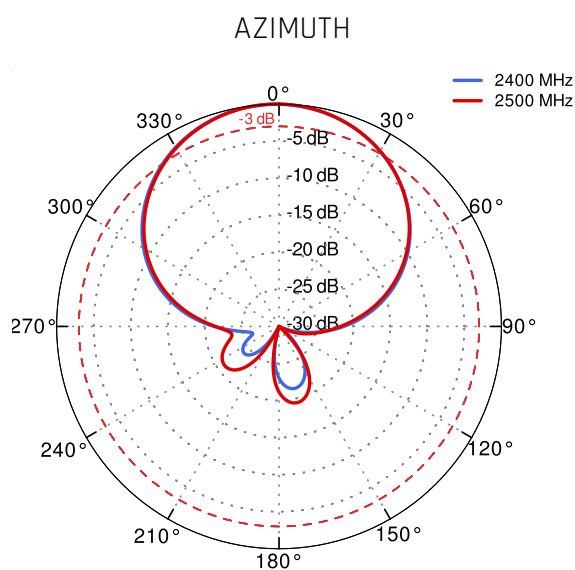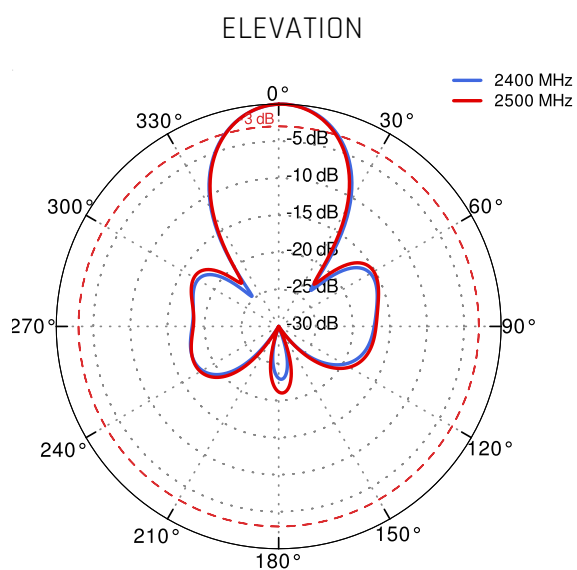



PORT 2 From 2.4GHz to 2.5GHz

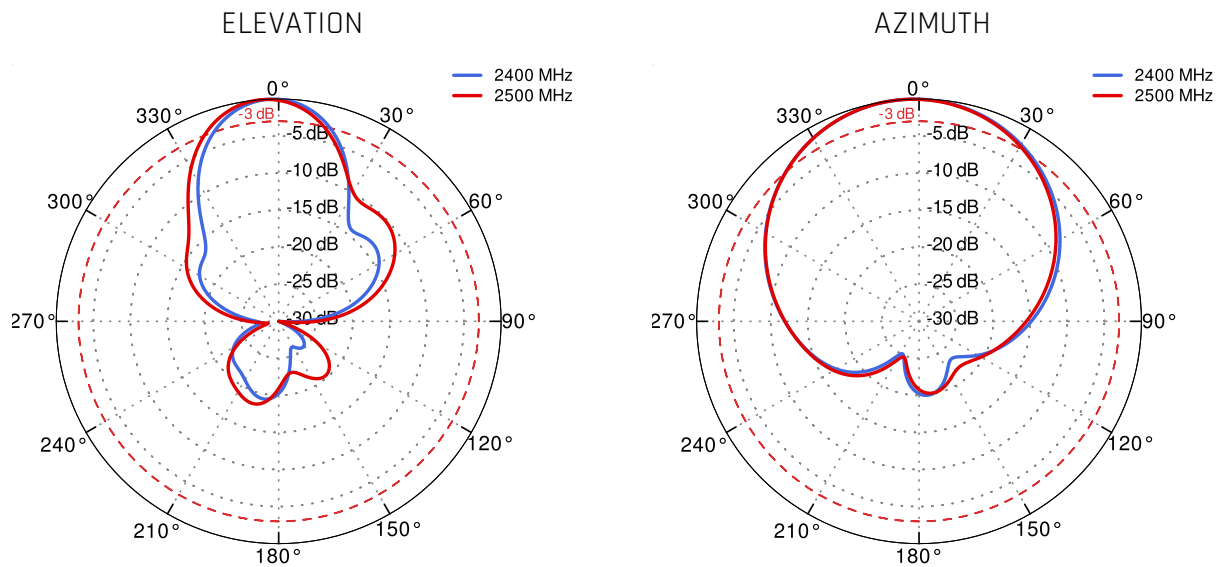

PORT 1 From 5.1GHz to 5.9GHz

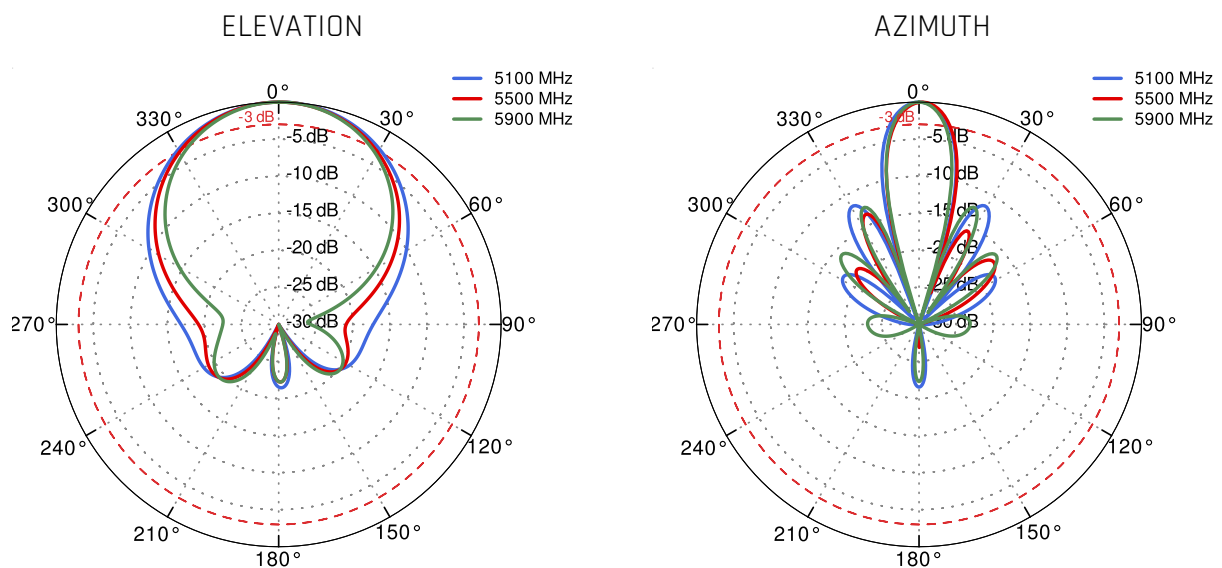

PORT 2 From 5.1GHz to 5.9GHz

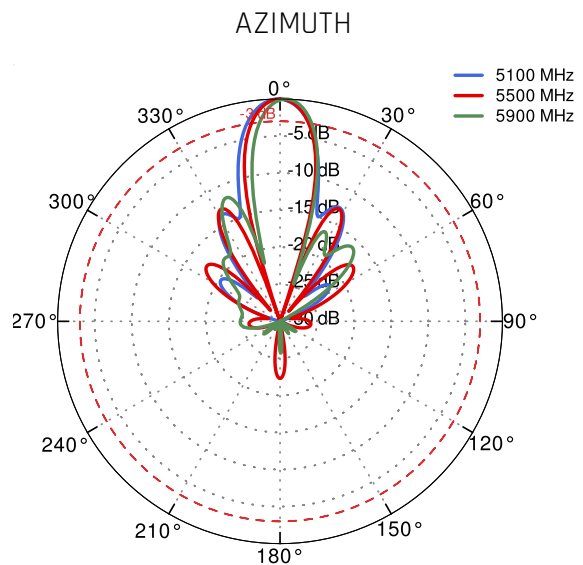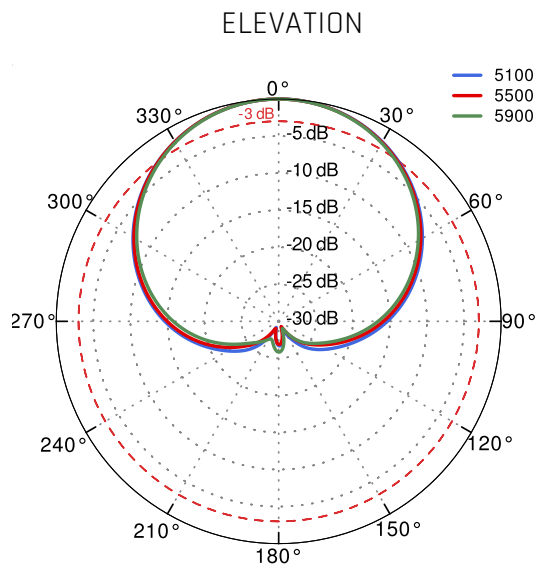

DIMENSIONS

