

# QuSector 14HV-90-4 Wi-Fi 6E

QuSector 14HV-90-4 offers a 90 degrees, 14dBi gain signal with two RP-SMA 2.4GHz and 5GHz+7GHz connectors. It is a perfect indoor and outdoor device for industrial installations.

QuSector 14HV-90-4 is a concurrent, dual-band, H&V polarity, MIMO 4x4 panel antenna. It simultaneously operates at 2.4GHz with 12dBi gain and **5GHz + 7GHz** with 14dBi gain. It is a futureproof solution with **Wi-Fi 6E** and **Wi-Fi 7** support. Due to its medium gain, it can be used on short or medium distances, for example for hotspots in schools, stadiums, offices or public places. High quality injection moulded enclosure allows to implement it alongside with indoor and IP67 outdoor solutions. The antenna comes in three configurations: with 4\*70cm (28inch) cables terminated with Nm, RPSMA or RPTNC connectors. QuSector 14HV-90-4 was designed to be a perfect match for your access point.

**Wi Fi 6E**  
2.4GHz + 5GHz  
6GHz + 7GHz  
14 dBi  
DIRECTIONAL  
IP 67  
-40° TO +80°  
4x4 MIMO

OUTDOOR ANTENNA WORKS IN **ANY**  
WEATHER CONDITIONS, IP67



ANTENNA **PERFECTLY MATCHED** WITH  
THE ROUTER



WALL OR MAST MOUNTING SYSTEM  
WITH **TWO PLANES, 60 DEGREES**  
REGULATION



MADE IN **EUROPE**



## WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5.0 - 7.125 GHz
GAIN	12 dBi 14 dBi
VSWR	< 2.00
BEAMWIDTH	90°/30° 90°/16°
POLARIZATION	Horizontal Vertical
IMPEDANCE	50 $\Omega$
SEPARATION BETWEEN CONNECTORS	>30 dB
FRONT-TO-BACK	> 20dB >25dB
MAX INPUT POWER	50W
DC GROUND	Yes

## MECHANICAL SPECIFICATION

MATERIAL	ABS
CONNECTOR	4xRPSMA/4xNM/4xRPTNC
OUTER DIMENSIONS	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
WEIGHT	1.8 kg
OPERATING TEMPERATURE	-40°C to +80°C -40°F to 176°F

## MOUNTING KIT

DIMENSIONS	9.9 x 10.5 x 14.8 cm 3.9 x 4.13 x 5.83 inch
REGULATION RANGE	+/- 30°
MAST DIAMETER RANGE	25 - 60mm 0.98-2.36 inch
MATERIAL	Polyamide with fiberglass + galvanized steel U-Bolts
MOUNTING PLACE	Wall or ceiling or mast

## COMPATIBLE ROUTERS

VARIANT: S14HV.90.4RS

ADTRAN	Bluesocket 1925
ADVANTECH	EKI-6333AC-2G, EKI-6333AC-4GP, EKI-6333AC-M12
ALCATEL-LUCENT	Stellar AP1222, Stellar AP1322
ARUBA	AP-314, AP-324, AP-334, AP-344, AP-514, AP-534, AP-634, IAP-314, IAP-324, IAP-334
CAMBIUM NETWORKS	ePMP 4600
CISCO	Catalyst IW9165E
COMSET	CM770W-6
D-LINK	DWL-6600AP, DWL-6610APE, DWL-8600AP
ENGENIUS	EAP1300EXT, ECW160, ECW260, ENS620EXT, ESW850
EXTREME NETWORKS	AP 305Cx, AP 8533, AP3000X, AP310e
FORTINET	AP1020E, AP822E, FAP-223C, FAP-223E, FAP-224D, FAP-433F, FAP-433G, FAP-C225C, FAP-U223EV, FAP-U432F
HUAWEI	AP6150DN
JUNIPER NETWORKS	AP41E
MIKROTIK	RB912
MIST	AP32E, AP41E, AP43E, AP61E
PEPLINK	Balance 310 fiber 5G, MAX HD2, MAX HD4
WAVETEL	W3604 Multi-WAN, W3608 Multi-WAN

**WLINK**

G930

**OTHER**

4 \* RPSMA

VARIANT: S14HV.90.4NM

**AEROHIVE NETWORKS**

AP1130

**ARISTA**

O-105E

**CISCO**AIR-AP1562E, AIR-AP1572EAC, AIR-AP1572EC, AIR-CAP1532E,  
Catalyst 9163E, IW3702-2E, IW3702-4E, IW6300, MR74, MR76, MR84,  
MR86**D-LINK**

DWL-8710AP

**EXTREME NETWORKS**

AP 360E, AP 3965E

**FORTINET**

FAP-222C

**HUAWEI**

AP6510DN-AGN, AP6610DN-AGN, AP6760R-51E, AP8150DN

**PEPLINK**

AP Pro AX

**RUCKUS**

T750SE

**SIEMENS**

6GK5788-1GY01-0AA0, 6GK5748-1GY01-0AA0

**XIRRUS**

XH2-120

**OTHER**

4 \* N-male

VARIANT: S14HV.90.4RT

**CISCO**


AIR-AP1852E, AIR-AP2602E, AIR-AP2702E, AIR-AP2802E, AIR-AP3602E, AIR-AP3702E, AIR-AP3802E, AIR-AP3802P, AIR-CAP2702E, AIR-CAP3702E, AIR-CAP3702P, Catalyst 9115AXE, Catalyst 9120AXE, Catalyst 9120AXP, MR42E, MR46E, MR53E

**OTHER**


4 \* RPTNC

## PLOTS


Gain

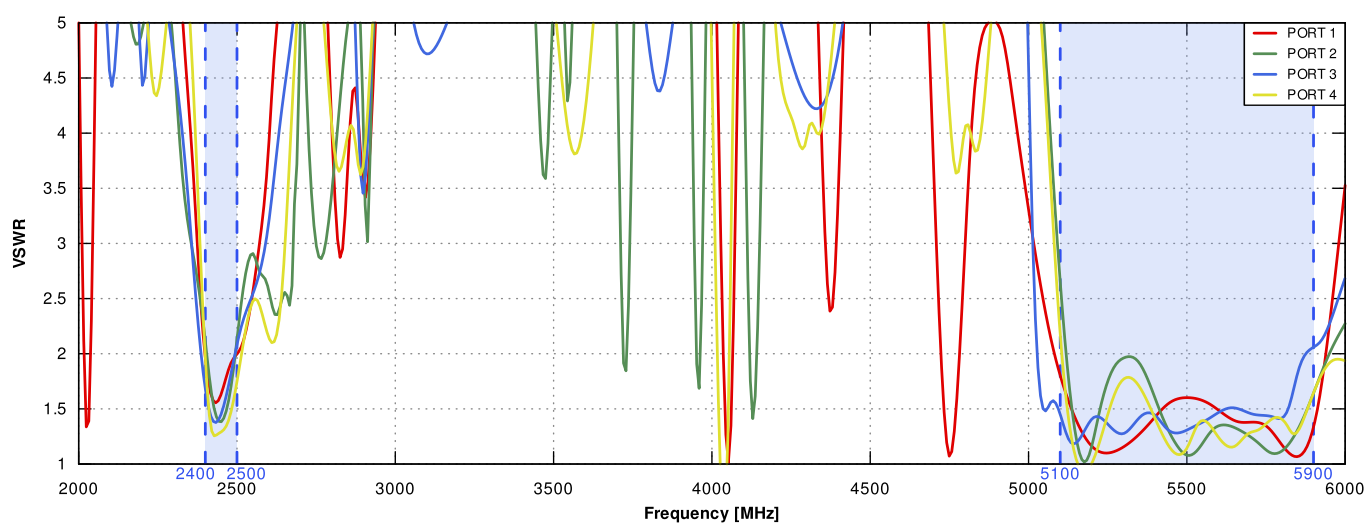


## VSWR

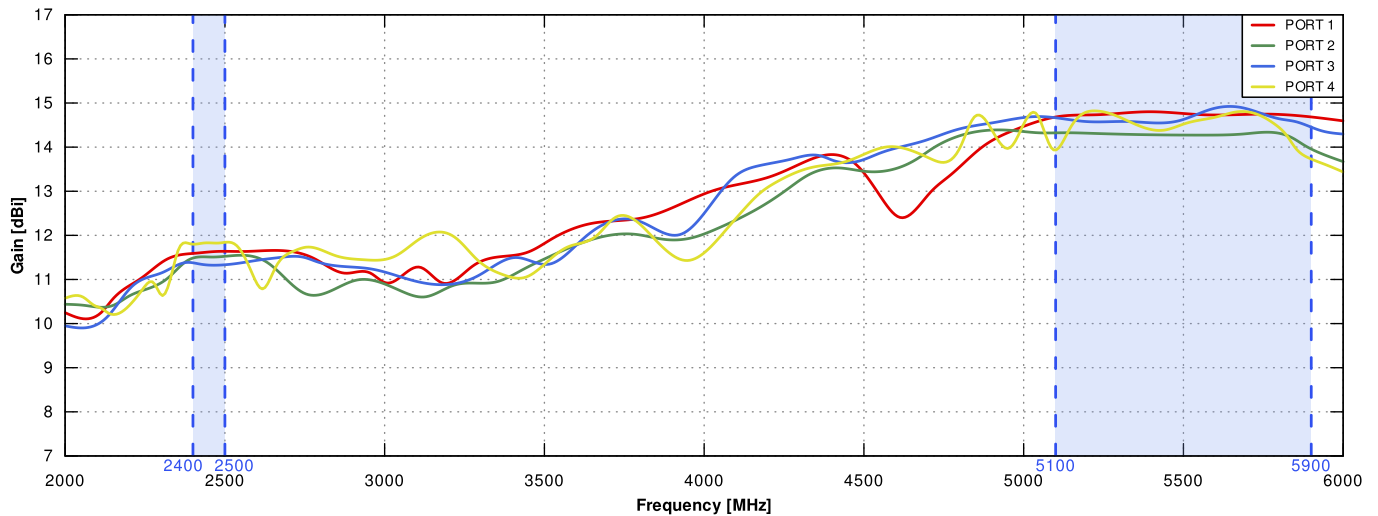


## PORT 1&3 From 2.4GHz to 2.5GHz

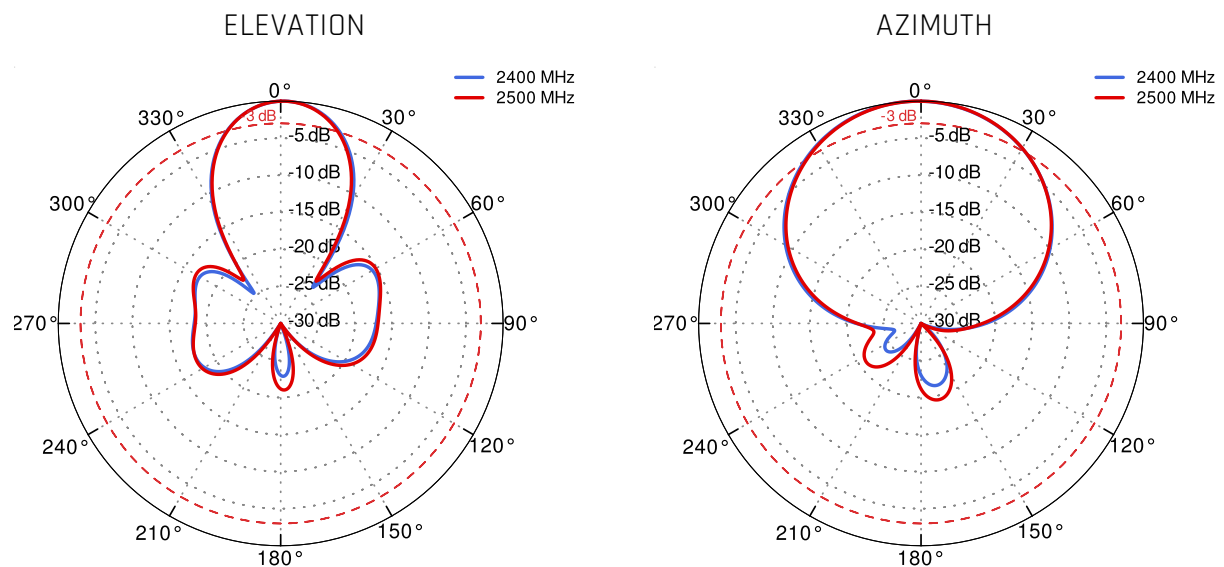

## PORT 2&4 From 2.4GHz to 2.5GHz


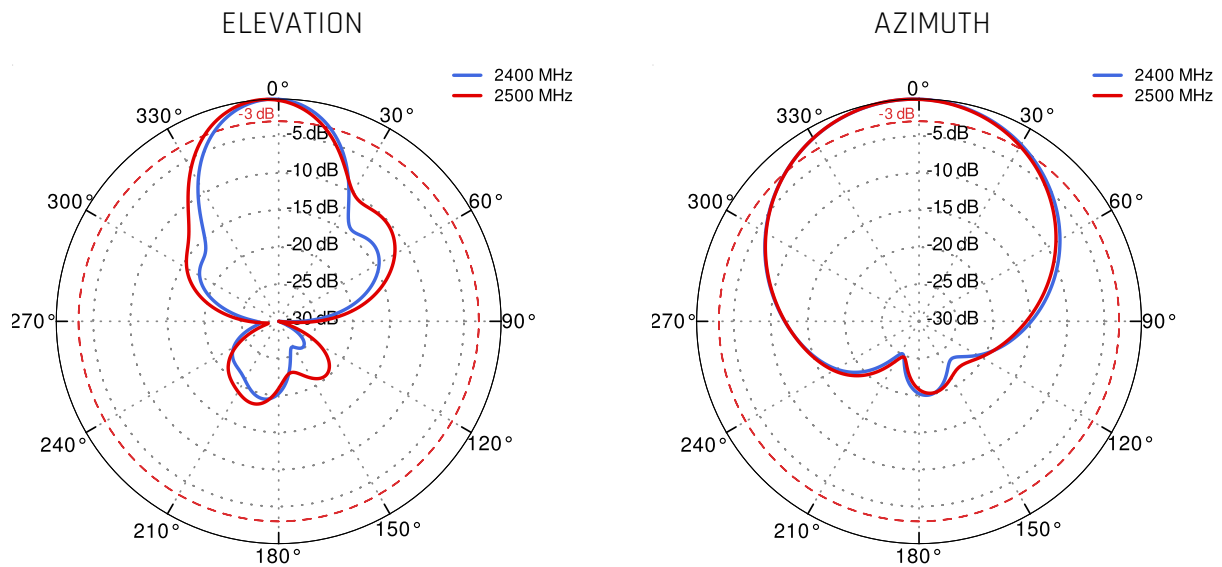


## PORT 1&3 From 5.1GHz to 5.9GHz

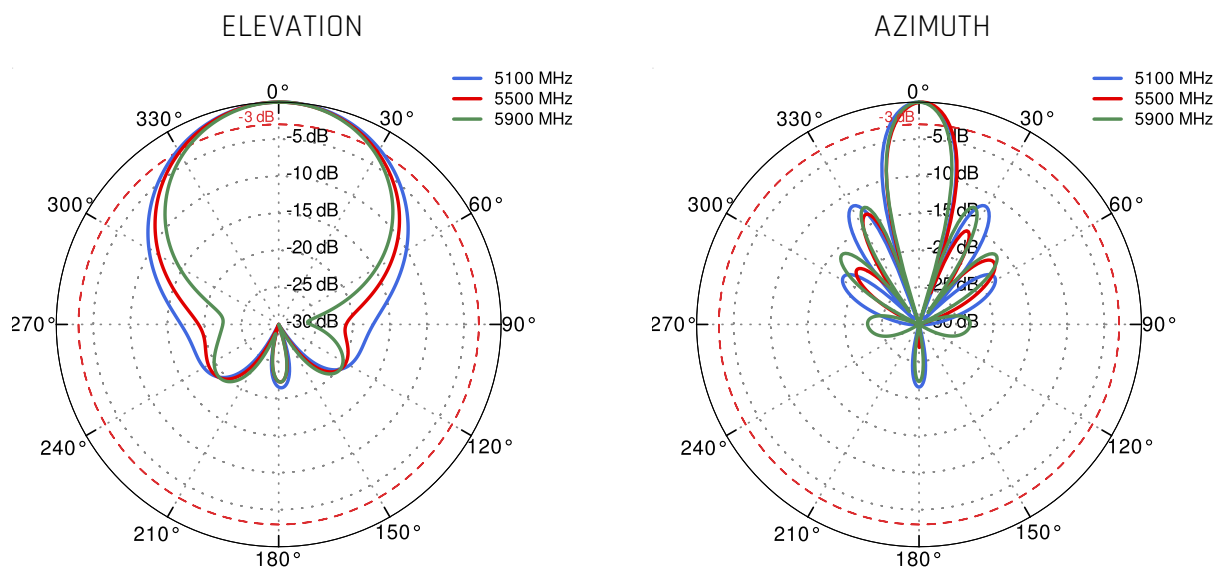



## PORT 2&4 From 5.1GHZ to 5.9GHZ

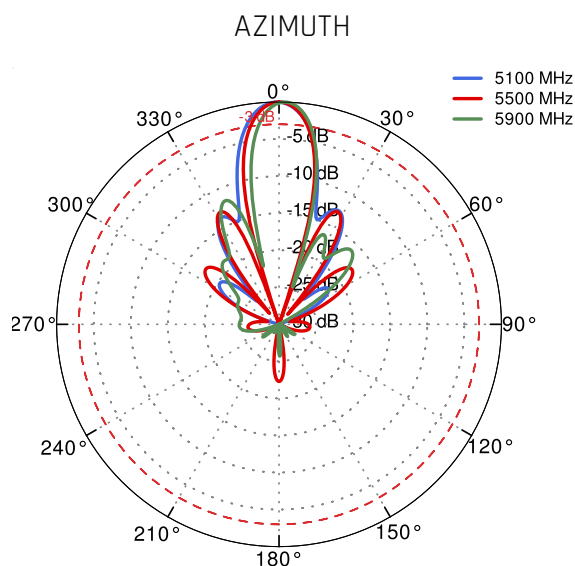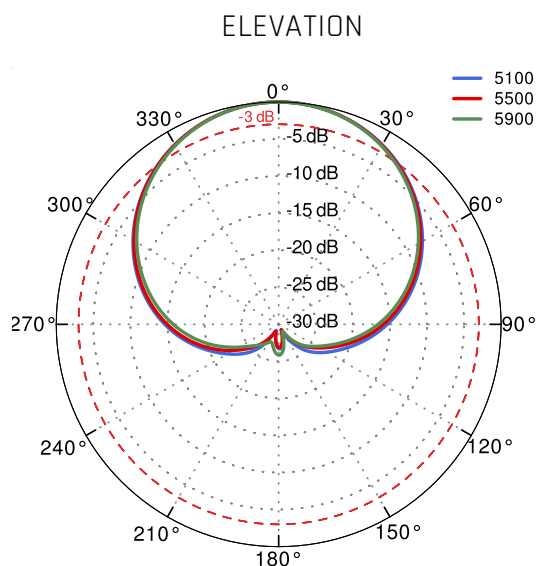

## DIMENSIONS

